

With all existing standard functions



VRV IV W⁺ series


Indoor installation makes unit invisible from the outside

- > Seamless integration in the surrounding architecture as you cannot see the unit
- > Highly suited for sound sensitive areas as there is no external operation sound
- > Very flexible indoor installation as there is no heat dissipation
- > Superior efficiency, even in the most extreme outside conditions, especially in geothermal operation



Variable water flow control

- > The variable water flow control option reduces excessive energy use by the circulation pump.
- > By controlling a variable water valve, the water flow is reduced when possible, saving energy.
- > Via 0~10 volt

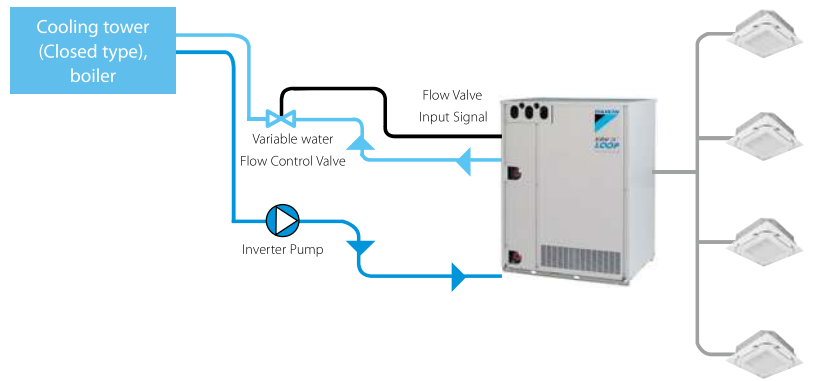

Lower refrigerant concentration levels

Water-cooled VRV systems typically have less refrigerant per system making it ideal to comply with the EN378 legislation limiting the amount of refrigerant in hospitals and hotels.

The refrigerant levels remain limited thanks to:

- > limited distance between outdoor and indoor unit
- > modularity: enabling small systems per floor instead of one big system. Thanks to the water circuit heat recovery is still possible in the entire building

Single port



BS1Q 10,16,25A

Multi port: 4 – 6 – 8 – 10 – 12 – 16



BS 4 Q14 A



BS 6, 8 Q14 A



BS 10, 12 Q14 A




BS 16 Q14 A


Maximum design flexibility and installation speed

- > Quickly and flexibly design your system with a unique range of single and multi BS boxes.
- > A wide variety of compact and lightweight multi BS boxes greatly reduces installation time.
- > Free combination of single and multi BS boxes

2-stage heat recovery

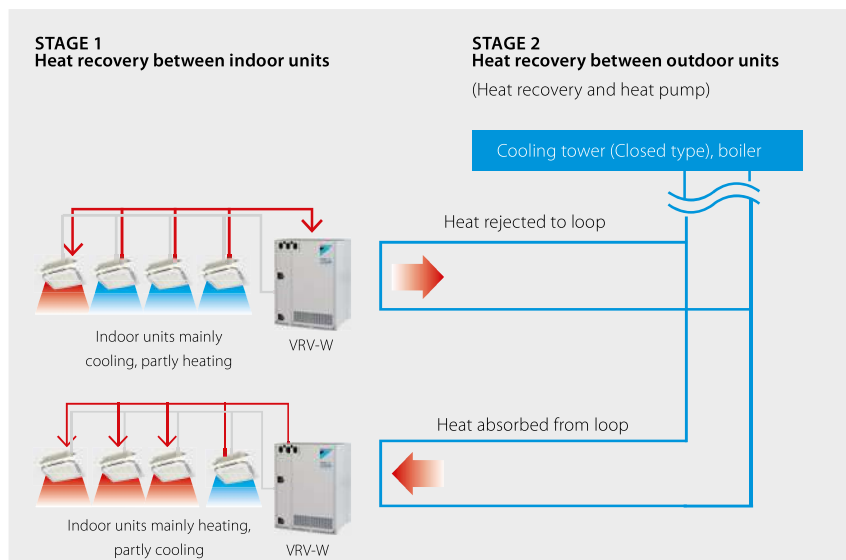

Stacked configuration

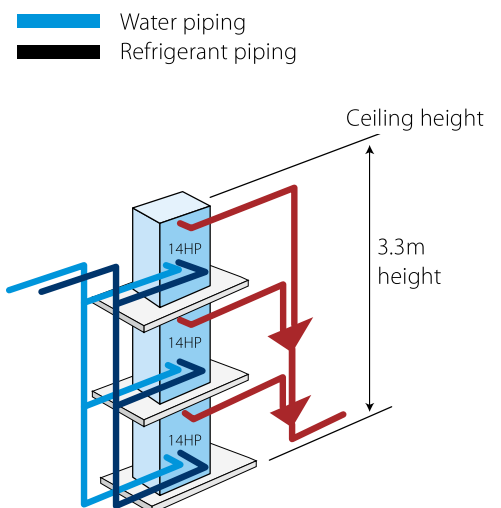


VRV IV water cooled+ series

Ideal for high rise buildings, using water as heat source

- › Environmental conscious solution: reduced CO₂ emissions thanks to the use of geothermal energy as a renewable energy source and typical lower refrigerant levels making it ideal to comply with EN378
- › Covers all thermal needs of a building via a single point of contact: accurate temperature control, ventilation, air handling units, Biddle air curtains and hot water
- › Unique zero heat dissipation principle obviates the need for ventilation or cooling in the technical room, maximising installation flexibility
- › Wide range of indoor units: possibility to combine VRV with stylish indoor units (Daikin Emura, Perfera)
- › Incorporates VRV IV standards & technologies: Variable Refrigerant Temperature, VRV configurator, 7-segment display and full inverter compressors
- › Developed for easy installation and servicing: choice between top or front connection for refrigerant piping and rotating switch box for easy access to serviceable parts
- › Compact & lightweight design can be stacked for maximum space saving: 42HP can be installed in less than 0.5m² floorspace
- › 2-stage heat recovery: first stage between indoor units, second stage between outdoor units thanks to the storage of energy in the water circuit

- › Unified model for heat pump and heat recovery version and geothermal and standard operation
- › Variable Water Flow control option increases flexibility and control
- › 2 analogue input signals allowing external control of ON-OFF, operation mode, error signal, ...
- › Contains all standard VRV features

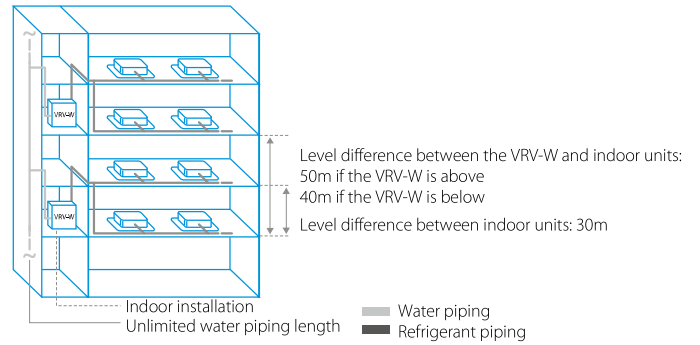

Already fully compliant to LOT 21 - Tier 2

Published data with real-life indoor units



For units made and sold in Europe*

Connectable stylish indoor units

		20 CLASS	25 CLASS	35 CLASS	42 CLASS	50 CLASS	60 CLASS	71 CLASS
Daikin Emura - Wall mounted unit	FTXJ-AW/AS/AB	•	•	•		•		
Stylish - Wall mounted unit	FTXA-AW/BS/BB/BT	•	•	•	•	•		
Perfera wall mounted	FTXM-R	•	•	•	•	•	•	•
Perfera floor standing	NEW FVXM-A9	•	•	•		•		

BPMKS box needed to connect RA indoors to VRV IV (RYYQ / RXYQ)

More details and final information can be found by scanning or clicking the QR codes.



RWEYQ-T9

Outdoor unit		RWEYQ	8T9	10T9	12T9	14T9
Capacity range		HP	8	10	12	14
Cooling capacity	Prated,c	kW	22.4	28.0	33.5	40.0
Heating capacity	Prated,h	kW	25.0	31.5	37.5	45.0
	Max. 6°CWB	kW	25.0	31.5	37.5	45.0
Recommended combination			4x FXMQ50P7VEB	4x FXMQ63P7VEB	6x FXMQ50P7VEB	1x FXMQ50P7VEB + 5x FXMQ63P7VEB
ηs,c		%	326.8	307.8	359.0	330.7
ηs,h		%	524.3	465.9	436.0	397.1
SEER			8.4	7.9	9.2	8.5
SCOP			13.3	11.8	11.1	10.1
Maximum number of connectable indoor units			64 (1)			
Indoor index connection	Min.		100.0	125.0	150.0	175.0
	Max.		300.0	375.0	450.0	525.0
Dimensions	Unit	HeightxWidthxDepth	mm			
Weight	Unit		kg			
			195			
Sound power level	Cooling	Nom.	dBA			
			65.0			
Sound pressure level	Cooling	Nom.	dBA			
			48.0			
Operation range	Inlet water temperature	Cooling	Min.~Max.	°CDB		
		Heating	Min.~Max.	°CWB		
	Temperature around casing	Max.	°CDB			
		Humidity around casing	Cooling~Heating	Max.	%	
			80 ~80			
Refrigerant	Type/GWP		R-410A/2,087.5			
	Charge	kg/TCO ₂ Eq	7.9/16.5		9.6/20.0	
Piping connections	Liquid OD		mm			
			9.52			
	Gas OD		mm			
			19.1			
	HP/LP gas OD		15.9/19.1		19.1/22.2	
Drain Size		14mm OD/ 10mm ID				
Water	Inlet/Outlet	Size	ISO 228-G1 1/4 B/ISO 228-G1 1/4 B			
		Total piping System length	Actual	m		
			500			
Power supply	Phase/Frequency/Voltage	Hz/V	3N~/50 /380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	20		25	